



TESI MEMORY

10 elements, height 1800 mm, length 654 mm. Tobacco Brown finish (cod. 1B).



Technical features:

- sheet steel tubes with diameter 25 mm
- moulded sheet steel manifolds
- element length 65 mm
- manifold top and bottom end threads 1/2" G right
- maximum allowed working pressure 10 bar
- maximum allowed working temperature 95°C

Price included:

- kit for fixing to the wall in a finish coordinated with the radiator
- hydraulic connection kit (valve and lockshield valve) in a finish coordinated with the radiator
- chrome-plated vent valve kit
- kit of pipe covers and hole cover kit (rosettes)
- 1 1/2" end plug complete with chrome-plated cover

N.B.: The hydraulic connection kit, supplied with the radiator, includes valve and lockshield valve in angled version, both for separate valve and lockshield valve and for 50 mm pitch valve, complete with connections for copper pipes (diameters 12, 14 and 15 mm) and multilayer (14 sp. 2 and 16 sp. 2).








| Finishes available | Surcharge |
|-------------------------|-----------|
| Standard White | |
| Classic finishes | |
| Special finishes | |
| Loft finishes (cod. TR) | |
| Other RAL colors | |


Finishing codes see page 596.

HYDRAULIC FITTINGS

The configurations available are:

- 1) **Cod. 02** Lateral and counterpoised connection (fig. 1 and 2)
- 2) **Cod. 08** and **60** Connection of first and last element with internal diaphragm (fig. 3 and 4)
- 3) **Cod. 18** Connection with 50 mm connection center (right or left) with internal diaphragm (fig. 5 and 6)
- 4) **Cod. 50** Connection centered on the unit with 50 mm connection center (fig. 7)

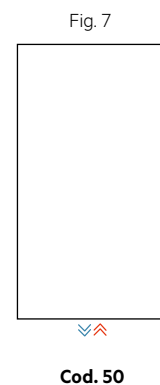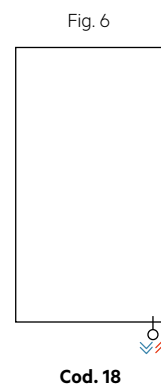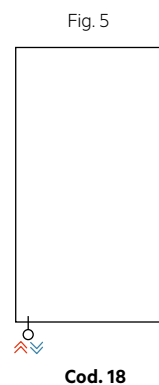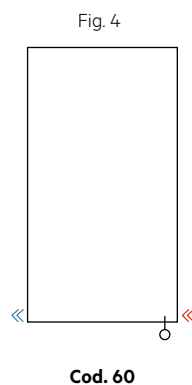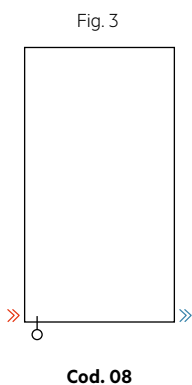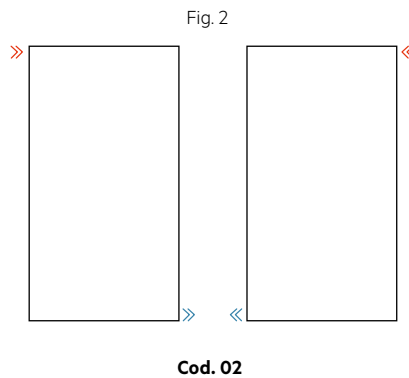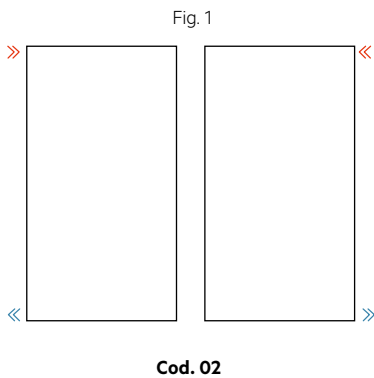

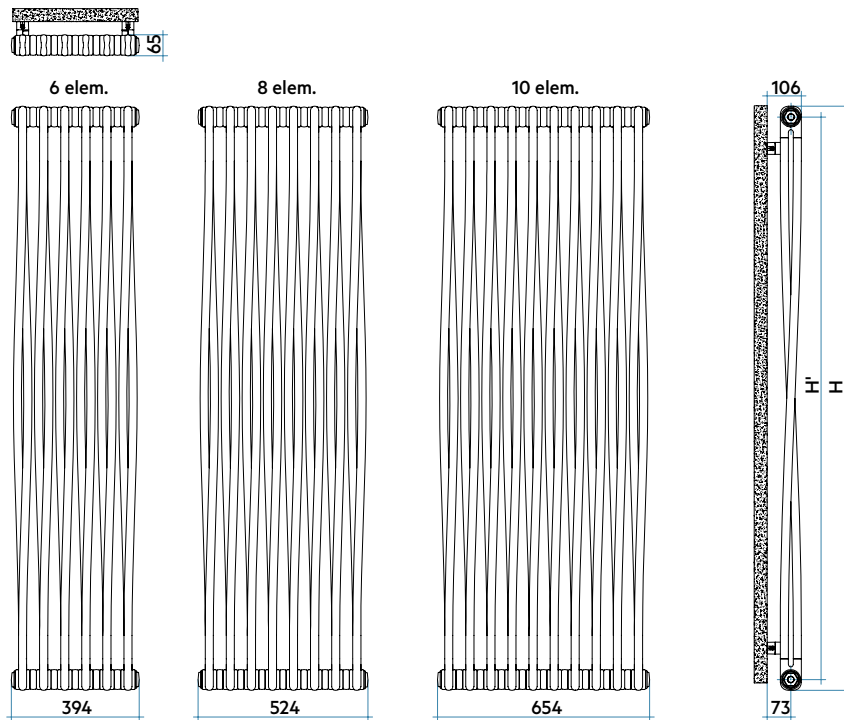

| H mm | H' mm |
|------|-------|
| 1802 | 1735 |
| 2002 | 1935 |



DESIGN RADIATORS

| Model | Code | Depth mm | Height H mm | Width L mm | Conn. c. L' mm | Weight Kg | Cap. lt | Thermal Power | | | | Exp. n. | |
|-------------|--------------------------------|-------------|----------------|---------------|-------------------|--------------|------------|--|---------------------------------------|---|---------------------------------------|------------|-------|
| | | | | | | | | $\Delta t=50^{\circ}\text{C}$ Btu/h Watt | $\Delta t=40^{\circ}\text{C}$ Watt | $\Delta t=30^{\circ}\text{C}$ Watt (*) | $\Delta t=20^{\circ}\text{C}$ Watt | | |
| 1800 06 el. | RM 2 1800 06 XX IR 02 N | 65 | 1802 | 394 | 1735 | 15,2 | 10,5 | 3059 | 896 | 669 | 459 | 270 | 1,311 |
| 1800 08 el. | RM 2 1800 08 XX IR 02 N | 65 | 1802 | 524 | 1735 | 20,3 | 14,0 | 4078 | 1195 | 892 | 612 | 360 | 1,311 |
| 1800 10 el. | RM 2 1800 10 XX IR 02 N | 65 | 1802 | 654 | 1735 | 25,4 | 17,5 | 5098 | 1494 | 1115 | 765 | 450 | 1,311 |
| 2000 06 el. | RM 2 2000 06 XX IR 02 N | 65 | 2002 | 394 | 1935 | 16,8 | 11,5 | 3392 | 994 | 743 | 510 | 301 | 1,306 |
| 2000 08 el. | RM 2 2000 08 XX IR 02 N | 65 | 2002 | 524 | 1935 | 22,4 | 15,4 | 4523 | 1326 | 990 | 680 | 401 | 1,306 |
| 2000 10 el. | RM 2 2000 10 XX IR 02 N | 65 | 2002 | 654 | 1935 | 28,0 | 19,2 | 5654 | 1657 | 1238 | 850 | 501 | 1,306 |

(*) Thanks to the high performance of Irsap TESI MEMORY radiators, the ideal Δt for low temperature projects is Δt at 30°C .

For Δt different from 50°C use the formula: $Q=Q_n (\Delta t / 50)^n$

Starting from 2010 sales, the whole range of TESI radiators is guaranteed for 10 years.

Key Codes

